AlarmCutoff Timer

CVM-60

Pulse Speed

Set for desired Timing Range

S2

AlarmSaf Model CVM-60

Delay Adj.

S1

WHT   RED   BLU

+   I   Trip   **NO**   **C**   **NC**

Alarm Output From Panel

To Bell/Siren ETC.
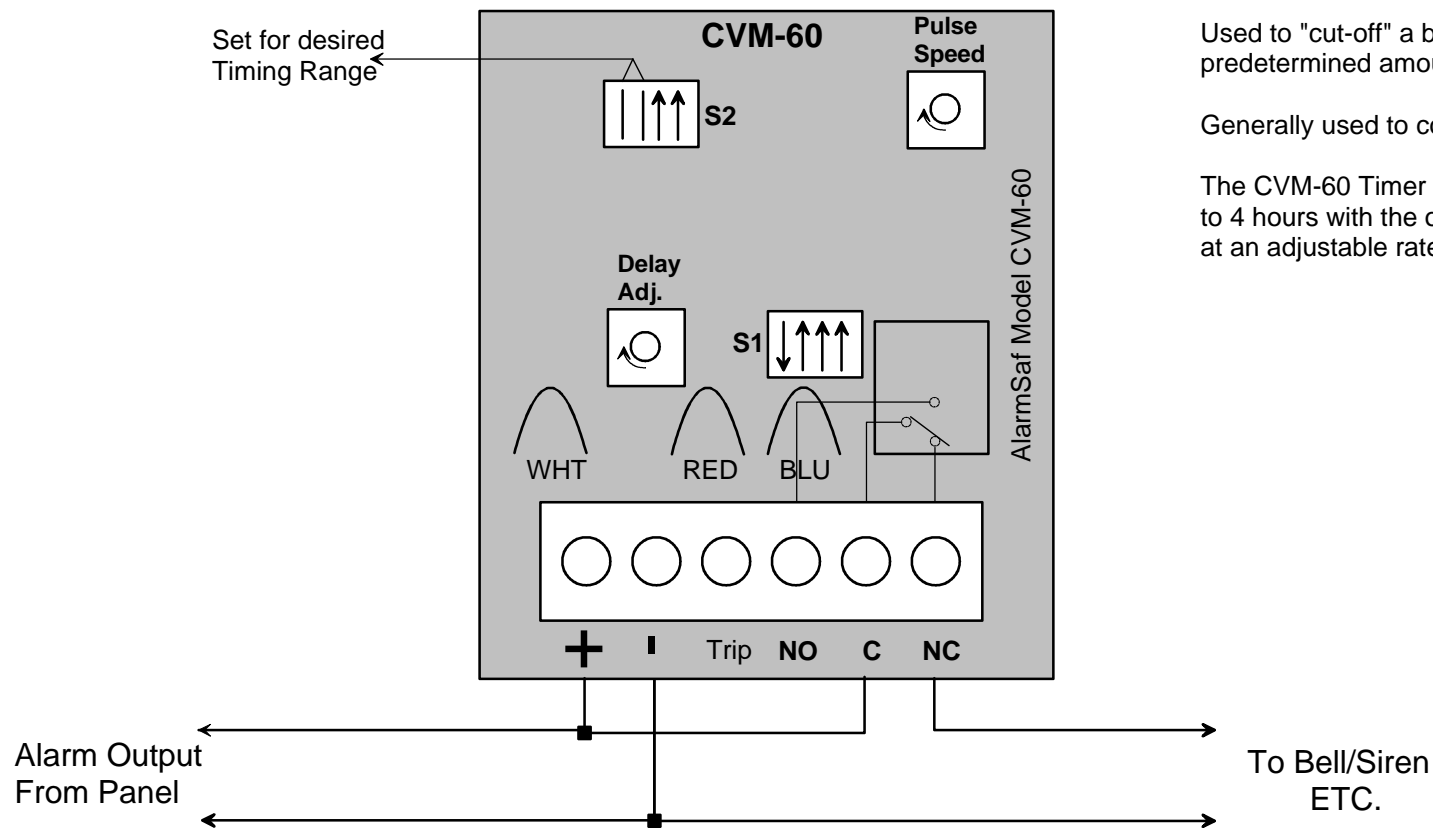
Used to "cut-off" a bell or siren device after a predetermined amount of ring time.

Generally used to comply with noise pollution laws

The CVM-60 Timer may be adjusted from 1 second to 4 hours with the output either continuous or pulsed at an adjustable rate.

The CVM-60 Timer may be adjusted from 1 second to 4 hours with the output either continuous or pusled at an adjustable rate.